

When quality matters Technidyne is there

ISO
brightness
d/0

The TEST/Plus™ product line brings standardized testing to the market in an affordable and cost competitive design. Providing you control of what you test and how you test it, while enhancing your quality programs capabilities.



The Technidyne TEST/Plus™ ISO Brightness combines industry standardized measurement technology with an innovative control package that allows the user to tailor build their testing and evaluation capabilities. This new addition to the TEST/Plus™ product line is built to meet your ISO Brightness testing needs;

When quality matters, Technidyne is there.



TEST/Plus™ ISO Brightness

- Measurements in seconds
- Conforms to ISO Standards 2469 and 2470
- Adaptive Interface Technology
- Fluorescence measurement option
- Adjustable UV source
- Easy-To-Use Operator Interface

TEST/PLUS™

At the core of the TEST/Plus™ ISO Brightness are a series of specially developed APPS that allow for complete control of your data and how you interface with the instrument and your operation.

Print App

- for hard copy of the data

Averaging and Statistics App


- for statistical analysis

Export App

- for getting the data to the DCS

Database App

- for managing data on the instrument

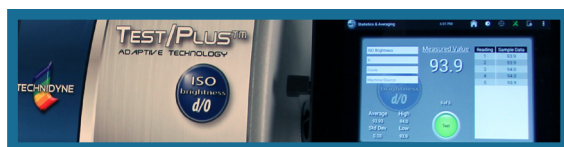



TEST/PLUS™

ISO Brightness

Adaptive Interface Technology

ISO
brightness
d/0

Specifications and Technical Data

TEST/Plus ISO Brightness and Fluorescence Specifications

Parameter	Specification	Parameter	Specification
Industry Standardization		Light Source	Quartz Tungsten Halogen, UV LED
Paper, Tissue & Board	ISO 2469, 2470, 12625-15/7, TAPPI T525, T 534, SCAN P3	Fluorescence Measurement	Optional UV excluded measurement
Measurement Range	0 - 100 on ISO Brightness Scale	Measurement Time	< 2 seconds
Measurement Units	ISO Brightness	Data Communications	Wifi, Ethernet, USB
Measurement Accuracy	± 0.3 %	Optional Operational APPs	Averaging and Statistics Print Data Export Database
Geometry	Dual Beam, d/0	Operating Temperature	10-32 degrees Celsius
Integrating Sphere Geometry	150 mm	Depth	14" / 35.6 cm
Sample Aperture Diameter / Sample Area of View Diameter	34 mm / 30 mm	Width	9" / 23 cm
Spectral Match Bandwidth	± 0.5 nm	Height	19" / 38 cm
Calibration Standards	Traceable to ISO IR1 calibration standards	Power Consumption	170 watt max / 80 watts passive
Accuracy to ISO Standard	± 0.3 %	Voltage / Frequency	100 - 230 VAC / 48-61
Repeatability	0.03 Brightness Units (20 Measurements on white tile)	USB Port	1
Reproducibility	± 0.3 Brightness Units	Foot Switch Measurement	Optional

Optimizing your processes is the goal of any manufacturing environment.

The Technidyne TEST/Plus™ ISO Brightness provides a tool for the effective evaluation of your processes. Once accurate evaluations are established, then process control parameters can be set. The TEST/Plus™ ISO Brightness can be counted on to be that repeatable evaluation tool to help you optimize your system. When the process has to be right, you need the right tools. With the TEST/Plus™ ISO Brightness you can make it right the first time.



When quality matters, Technidyne is there

Headquarters

100 Quality Avenue
New Albany, IN 47150 USA
+1.812.948.2884
spectrum@technidyne.com
www.technidyne.com

Canada

540 Meloche
Dorval, Quebec H9P2T2
Canada
+1.514.631.1188
techinc@technidyne.com

China

RM502, 9/F, Di Bao
International Plaze
No.3998 Hongxin Road
Shanghai, China 201103
+86.21.5187.5199
paulc@technidyne.com

Asia

388 Exchange Tower
29th Floor
Sukumvit Road
Bangkok, Thailand 10110
+66.2.101.9203
paulc@technidyne.com