



CALL TOLL FREE **1-800-373-9989**

## GEK Digital Adjustable Torque Wrench

Series GEK Digital Adjustable Torque Wrenches

### Standard Features

- High accuracy  $\pm 1.5\%$  F.S. (clockwise with display facing you, counterclockwise with display facing away from you)
- The best known, rugged, high quality tools for over 60 years!
- Peak, peak with auto zero reset and Real Time modes
- Five programmable torque presets ideal for frequent operations.
- Pass/Fail mode counts fasteners tightened within programmed High/Low limits, using LED and audible alerts
- Selectable units, lbf-in, lbf-ft, kgf-cm, N-m
- ISO-6789 Compliant
- Calibration cert traceable to NIST and carrying case included

The GEK Digital Adjustable Torque Wrench expands torque applications to places where a socket wrench cannot work. The wrench features forged steel jaws and a unique power sensor in the handle which accurately detects and analyzes load applied to the grip, regardless of hand position. The ergonomic grip helps keep the torque point in the center of your hand. The specially designed jaws maintain a constant working length whether open or closed. This design assures greater accuracy in torque measurement.




### Operation Modes

These torque wrenches can measure in peak mode, peak with auto zero reset, and real time. Five programmable torque presets stored in memory enable the user to check frequently used values. The presets alert the user with an intermittent signal at 90% and a continuous signal at 100% of the preset torque value using LED and audible indicators (Presets cannot be set at less than 10% of capacity). Selectable units of lbf-in, lbf-ft, kgf-m, and N-m. Uses a lithium coin battery.

### What's Included?

All wrenches include a 3-Point Certificate traceable to NIST. ISO Certificates are available at an additional charge. All wrenches are sold as a kit and include: wrench, hard plastic carrying case and operation manual. Uses a lithium coin battery, Panasonic CR2354, which is included.

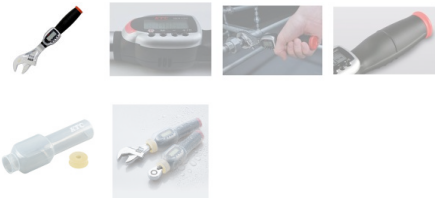

#### RANGES

Accuracy:  $\pm 1.5\%$  F.S.  $\pm 1$  LSD

Model		GEK085-W36E	GEK135-W36E	GEK200-W36E
Capacity	lbf-in	19.0~752.0	28~1195	46~1770
	lbf-ft	1.60~62.70	2.3~99.5	3.8~147.4
	kgf-m	0.21~8.66	0.32~13.76	0.55~20.40
	N-m	2.0~85.0	3.1~135.0	5.2~200.0

#### SPECIFICATIONS

Specifications

Accuracy	±1.5% F.S.
Measuring direction	CW with display facing you, CCW with display facing away from you
Measuring unit	Selectable lbf-in, lbf-ft, kgf-m, N-m
Data Memory	5 (storable Target torque values), 1 (Pass/Fail Mode)
Auto Shut OFF	Power automatically turns off after 2 minutes of non-use
Battery	Lithium coin battery CR2354
Battery Life	Approx. 2 months (100 usages per day)

OPTIONAL PROTECTIVE COVER

Optional Protective Cover  
Model GEK-A, complies with IPX4, allows operation and protects the wrench from splashes in production environments.

IMADA, Incorporated 3100 Dundee Rd., Suite 707, Northbrook, IL 60062 © Copyright 2019  
ISO 9001 Registered & ISO/IEC 17025 Accredited Phone: 847-562-0834 Fax: 847-562-0839